


PPMAX

PUNKT PODNOSZENIA PRZYKRĘCANY
 ANCHORAGE CLAMP WITH SCREW ON PLATE
 ÉTRIER D'ANCRAGE À PLAQUE À VISSER
 RINGBOCK SCHRAUBBAR

ARTYKUŁ NA ZAMÓWIENIE
 ARTICLE ON DEMAND
 ARTICLE SUR DEMANDE
 ARTIKEL AUF ANFRAGE



Codice Code Code Code	W.L.L.	A	B	C	D	E	F	G	H	I	L	M	N	Spessore saldatura Welding thickness Épaisseur de la soudure Dicke der Schweissnaht	Peso Weight Poids Gewicht
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	HV + Δa	Kg
C825X30	30	180	400	130	42	75	41	194	255	159	80	30	120	HV 15+4	61
C825X50	50	270	650	230	70	100	55	339	407	224	100	36	200	HV 25+8	202

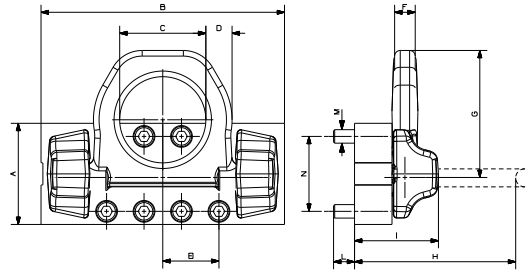

WORKING LOAD LIMIT W.L.L. (t)



Codice Code Code Code	0°	0°	90°	90°	0°-45°	45°-60°	Asimm	0°-45°	45°-60°	Asimm
	1 braccio Single leg 1 brin 1 Strang	2 bracci 2 legs 2 brins 2 Stränge	1 braccio Single leg 1 brin 1 Strang	2 bracci 2 legs 2 brins 2 Stränge	2 bracci 2 legs 2 brins 2 Stränge			3/4 bracci 3/4 legs 3/4 brins 3/4 Stränge		
C825X30	30	60	30	60	42	30	30	63	45	30
C825X50	50	100	50	100	70	50	50	105	75	50